

CERTIFICATE OF MAILING

I hereby certify that this paper and every paper referred to therein as being enclosed is being deposited with the U.S. Postal Service as express mail, postage prepaid, in an envelope addressed to: Commissioner of Patents & Trademarks, P. O. Box 1450, Alexandria, VA 22313-1450 on Feb 17, 2004 (Date of Deposit)

Date Feb 17, 2004 Name Robert L. Stone

Docket: Oz-4

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re Application of: David Oz

Serial No.: 10/668,020

Group Art Unit: 3642

Filed: September 22, 2003

Examiner:

For: RAIL CONNECTOR AND METHOD

-----  
Commissioner for Patents  
P.O. Box. 1450  
Alexandria, VA 22313-1450

Honorable Commissioner for Patents:

**LETTER**

Preliminary to examination, please find enclosed for filing in the subject application a certified copy of Israeli patent application 155627, filed June 24, 2003, for which priority has been claimed.

Examination is respectfully requested..

Respectfully submitted,

Robert L. Stone  
Registration No. 22,272  
Attorney for Applicant(s)  
732-254-2674



מדינת ישראל  
STATE OF ISRAEL

Ministry of Justice  
Patent Office

משרד המשפטים  
לשכת הפטנטים

This is to certify that annexed  
hereto is a true copy of the  
documents as originally  
deposited with the patent  
application of which  
particulars are specified on the  
first page of the annex.

זאת לתעודה כי רצופים  
בזה העתקים נכונים של  
המסמכים שהופקדו  
לכתחילה עם הבקשה  
לפטנט לפי הפרטים  
הרשומים בעמוד הראשון  
של הנספח.

היום 13-10-2003 This  
מ.ל.סרי  
על הבוחנים  
רשם הפטנטים  
Commissioner of Patents

נתאשר  
Certified

מספר: Number	156627
תאריך: Date	24-06-2003
הוקדם/נדחה Ante/Post-dated	

**ב ק ש ה ל פ ט נ ט**  
Application for Patent

אני, (שם המבקש, מענו ולגבי גוף מאוגד - מקום התאגדותו)  
:(Name and address of applicant, and in case of body corporate - place of incorporation)

**T.D.I. Arms Systems Ltd.**  
c/o Adv. Gil Cohen  
48 Derech Petah Tikva  
Tel-Aviv 66184

**ט.י. די. אי. מערכות נשק בע"מ**  
אצל עו"ד גיל כהן  
דרך פתח תקווה 48  
תל-אביב 66184

ששמו הוא **By Law**  
of an invention the title of which is

בעל אמצאה מכח **הדין**  
Owner, by virtue of

**מחבר מסילות ושיטה**


(בעברית)  
(Hebrew)

**RAIL CONNECTOR AND METHOD**

(באנגלית)  
(English)

hereby apply for a patent to be granted to me in respect thereof.

מבקש בזאת כי ינתן לי עליה פטנט

בקשת חלוקה Application of Division		בקשת פטנט מוסף Application for Patent Addition		דרישה דין קדימה Priority Claim		
מבקשת פטנט from Application		לבקשה/לפטנט to Patent/Apl.		מספר/סימן Number/Mark	תאריך Date	מדינת האגוד Convention Country
No.	מס'	No.	מס'			
dated	מיום	dated	מיום			
יפוי כח: כללי / פרטי P.O.A.: general/individual attached/to be filed later הוגש בענין 151933 המען למסירת מסמכים בישראל		Address for Service in Israel דבורה גדור, עו"ד ת.ד. 4133 גני תקווה 55900				
חתימת המבקש Signature of Applicant 				היום 22 בחודש יוני שנת 2003 of the year of This לשימוש הלשכה For Office Use		

סופט זה, כשהוא מוטבע בחותם לשכת הפטנטים ומושלם בספר ובתאריך ההגשה, הנו אישור להגשת הבקשה שפרטיה רשומים לעיל.  
This form, impressed with the Seal of the Patent Office and indicating the number and date of filing, certifies the filing of the application the particulars of which are set out above.

**מחבר מסילות ושיטה**

**RAIL CONNECTOR AND METHOD**

## FIELD OF THE INVENTION

The present invention relates to a rail connector for a firearm in general and, in particular, to a connector for mounting at least two rails on a rifle.

5

## BACKGROUND OF THE INVENTION

In recent years, the increasing complexity of combat has generated a need for weapons with increased accuracy and which are capable of supporting various accessories, such as flashlights, infrared and night vision scopes, laser spotters, and so forth. Consequently, a wide variety of mounts for rifles and other hand weapons have been developed which permit the mounting of lights scopes and the like on the weapon, often along the barrel. Such mounts are generally referred to as Modular Weapon Systems, and replace the factory handguards of the host weapon systems.

15 These modular weapon systems generally include Picatinny or other rails or tracks, often using MIL-STD-1913 for standardization of the mounting systems, and are affixed to the barrel or stock of the rifle for mounting accessories thereon. A variety of designs have been suggested for such modular weapon systems and such rails, as well as differing numbers of rails which can be coupled at one time to a rifle. At present, it is known to mount up to four rails about the handguard of a rifle.

20 Since the rails are generally mounted on the handguard (or handguard replacement) of the rifle, accessories mounted thereon must be zeroed often, since the alignment of the accessory relative to the barrel changes slightly during firing of the weapon or if the weapon receives a shock (i.e., falls).

25 Recently floating rails have been suggested. These include rails attached to a weapon in such a way as not to contact the barrel. These generally are attached at the rear of the rifle only, in order to attempt to provide more stability over time. However, these rails, also, suffer from alignment problems due to the shock created by the gases during firing. In addition, these rails can be mounted only by an

armorer, by taking apart the barrel and sight and reassembling the weapon with the floating rails.

Accordingly, there is a long felt need for a very stable mount for two or more rails, and it would be very desirable to have such a mount which permits the  
5 mounting of six rails on a single weapon and which can be assembled easily by the user of the firearm.

## SUMMARY OF THE INVENTION

The present invention provides a rail connector for a firearm which provides stable alignment over time, during firing of the weapon or even if the weapon receives a shock, thereby substantially maintaining the alignment of various accessories mounted on the weapon over time. According to one embodiment of the invention, six separate rails are provided on the mount.

There is thus provided, in accordance with the present invention, a connector for mounting on a firearm having a front sight, the connector including at least two accessory rails, and a fastening member for securely fastening the connector directly to the front sight of the firearm, the fastening member being coupled to the rails.

According to a preferred embodiment, the fastening member is shaped to seat securely in the front sight.

According to one embodiment of the invention for use on the AR15 platform based family of firearms, the sight includes a triangular projection defining a triangular aperture with a depending shoulder therethrough, and the connector includes a shaped protrusion for seating in the aperture against the shoulder, and a protruding lip for lockingly engaging a lower leg of the triangular projection.

According to one embodiment of the invention, the connector includes two half portions, each including a rail integrally formed with one half the fastening member, the half portions being adapted to seat on opposite sides of the sight and be connected to one another. The two rails may be formed coaxially in alignment with the fastening member, or displaced from and parallel to a longitudinal axis of the fastening member.

According to an alternative embodiment of the invention, the connector includes a handguard integrally formed with four rails, the handguard preferably being integrally formed with the fastening member, and further including a circumferential ring arranged to engage a toothed wheel mounted about the firearm barrel. Preferably, the connector is formed of two mating units, each including one half of the handguard, and arranged for mating fit around the barrel of a firearm.

## BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be further understood and appreciated from the following detailed description taken in conjunction with the drawings in which:

5        Fig. 1 is a perspective view of a rail connector constructed and operative in accordance with one embodiment of the present invention mounted on the front part of a firearm from the AR15 platform family;

      Fig. 2a is an exploded view of the rail connector of Fig. 1;

10       Fig. 2b is a side view of one half of the rail connector of Fig. 1 as seated in a front sight;

      Fig. 3 is a plan view of two halves of a rail connector constructed and operative in accordance with another embodiment of the present invention;

      Fig. 4a is a perspective view of a rail connector constructed and operative in accordance with a further embodiment of the present invention mounted on a barrel;

15       Fig. 4b is a side view of the rail connector of Fig. 4a;

      Fig. 4c is an exploded view of the rail connector of Fig. 4a;

      Figs. 5a, 5b, 5c, and 5d are respective outside, top, inside, and bottom of one half of a rail connector constructed and operative in accordance with another embodiment of the invention; and

20       Figs. 6a, 6b, 6c, and 6d are respective inside, top, outside, and bottom of the mating half of the rail connector of Figs. 5a to 5d.



## DETAILED DESCRIPTION OF THE INVENTION

The present invention relates to connectors for mounting a plurality of rails, such as Picatinny rails according to MIL-STD-1913, or other mounting rails, on a rifle or other firearm, in a secure fashion which substantially maintains alignment of accessories mounted thereon over time. This is accomplished by affixing the connector directly to the front sight of the weapon. The invention is particularly suitable for use on the P-90 of FN, the Galil of Israel Military Industries, of Ramat Hasharon, Israel, and the family of AR15 platform based weapons (e.g., M-16, AR15, A4), USA.

It is a particular feature of the invention that the connector is mounted on the front sight as it is, without requiring removal, dismantling, or otherwise changing the sight or any other armor work. Thus, a soldier can mount the connector by himself, without requiring any factory adjustments or mounting.

Referring now to Figs. 1 and 2a, there are shown respective perspective and exploded views of a rail connector 10 constructed and operative in accordance with one embodiment of the present invention. Rail connector 10 is adapted for mounting on the barrel 20 of a firearm having a front sight 22, and includes at least two accessory rails 12, and a member 14 for securely fastening the connector directly to the front sight 22 of the firearm.

In this embodiment, the two rails 12 are displaced from and parallel to a longitudinal axis of the fastening member 14. The mounting rails can be of any suitable shape and size, but preferably are Weaver or Picatinny rails, conforming to MIL-STD-1913 and MIL-STD-1913 Update Notice.

As can be seen most clearly in Fig. 2b, in the illustrated embodiment for use with the AR-15 family of firearms, sight 22 includes a substantially triangular frame 24 defining a triangular aperture 26 with a depending shoulder 28 therein. The fastening member 14 of connector 10, as seen in Figs. 2a and 2b, is a shaped protrusion including a sloping wall 16 for seating in aperture 26 and a depression 18 for abutting against the shoulder 28. Fastening member 14 also includes a protruding

lip 19 for lockingly engaging the lower leg 25 of the triangular frame 24. In this preferred embodiment, each rail 12 is integrally formed with one half of the fastening member 14, the two halves being coupled about the sight 22, as by screws or bolts. In this way, each side of the rail connector is a mirror image of the other. Alternatively, the fastening member can be integrally formed with one rail and, after seating through the front sight of the weapon, the second rail can be coupled to the fastening member, as by bolts.

It is a particular feature of the invention that the fastening member is shaped to be affixed securely to the front sight. Thus, the shape of the fastening member will differ according to the shape of the front sight of the particular firearm. In the illustrated embodiment of the present invention, the fastening member is shaped to seat securely in the original aperture of the front sight 22. Thus, in weapons with front sights which are shaped differently from that in Fig. 2, the locking member will be of the appropriate shape to securely seat in or couple to the sight.

According to an alternative embodiment of the invention, shown in plan view in Fig. 3, the rail connector 30 includes two rails 32 formed coaxially in alignment with the fastening member 34. In Fig. 3, as well, each rail 32 is coupled to one half of the fastening member 34 which are seated on opposite sides of the front sight of the weapon and coupled to one another. The fastening member of this embodiment is similar to that shown in Fig. 1, and includes a shaped protrusion including a sloping wall 36 and a depression 38 for seating in the aperture in the front sight and abutting against the shoulder in the sight. Fastening member 34 also includes a protruding lip 39 for lockingly engaging the sight. According to one embodiment of the invention, the fastening member includes a hollowed out portion 35, to reduce the material required to form the connector and to reduce its weight.

Referring now to Figs. 4a, 4b, and 4c there are shown respective perspective, side and exploded views of a rail connector 50, constructed and operative in accordance with a further embodiment of the present invention, mounted on a barrel 40 having a front sight 42. In this embodiment, front sight 42 is a substantially

triangular, hollow sight. Rail connector 50 includes an integrally formed handguard, thereby providing a single unit which includes six mounting rails, a feature which does not exist at present. Thus, two rails are provided on the connector portion, itself, and four rails are provided on the hand guard portion.

5        It is a particular feature of this embodiment that the connector, thus, provides mounting for a number of accessories, simultaneously, which do not need to be zeroed repeatedly, as the alignment is substantially unchanging during firing or if the weapon receives a shock. According to a preferred embodiment of the invention, illustrated in Fig. 4c, the connector is formed of two mating units, each including one  
10   half of the handguard 60, and arranged for mating fit around the barrel and gas tube of a firearm.

Rail connector 50 includes a connector portion 52, which can be substantially similar to rail connector 30 shown in Fig. 3, and a handguard portion 60. Connector portion 52 includes two rails 54 and a fastening member 56 shaped to seat inside the  
15   hollow sight 42. According to the illustrated embodiment, connector portion 52 is formed of two mirror image units, each including one half of the fastening member 56. Alternatively, the connector portion can include one rail coupled to, or preferably, integrally formed with a fastening member extending from side to side of the sight, and arranged to be coupled directly to a second rail.

20        Handguard portion 60 preferably includes two mating portions 62, 64 which are coupled, as by screws or bolts, around the barrel. Most preferably, the handguard portion 60 includes four integrally formed mounting rails 66, such as Picatinny rails, and complementary joining elements 68, 69 to permit assembly of the rail connector about the gas tube of the firearm. Preferably, the handguard portion includes a  
25   circumferential groove 70 arranged to engage a toothed ring 72 about the firearm barrel, and a tapered end 74 arranged to be engaged by a locking ring 76, for maintaining the hand guard in an anchored orientation on the barrel. It will be appreciated that, provided there is sufficient space, any number of rails may be mounted on the handguard.

Figs. 5a, 5b, 5c, and 5d are respective outside, top, inside, and bottom of one half of a rail connector 90 constructed and operative in accordance with one embodiment of the invention, suitable for mounting on any of the AR15 platform family members. Rail connector 90 includes a connector portion 92 integrally formed with a handguard portion 100. Connector portion 92 includes two rails 94 and a fastening member 96 shaped to seat inside the hollow sight of the firearm. Screw holes 98 may be provided for coupling one half of the rail connector to another on opposite sides of the front sight of the firearm.

Handguard portion 100 is one of two mating portions which are coupled, as by screws or bolts, around the barrel. In this embodiment, the handguard portion 100 includes two integrally formed mounting rails 102, such as Picatinny or Weaver rails. One face of the handguard portion may be cut to provide a pair of complementary elements 104 designed to permit assembly of the handguard portion about the gas tube of the firearm. For use with the M16 family of weapons, handguard portion 100 further includes a circumferential groove 106 arranged to engage a toothed ring on the firearm barrel, and may include a tapered end 108 arranged to sit inside a locking ring, also on the barrel, so as to provide a rear anchor for the handguard.

It will be appreciated that different firearms have different elements for mounting and anchoring their handguards about the barrel. The rail connector of the present invention preferably will be adapted to be anchored by the specific elements found on the firearm with which it is to be used.

Figs. 6a, 6b, 6c, and 6d are respective inside, top, outside, and bottom of the complementary half 120 of the rail connector of Fig. 5a. This half also includes a connector portion 122 integrally formed with a handguard portion 130. Connector portion 122 includes two rails 114 and a fastening member 116 shaped to seat inside the hollow sight of a firearm and be coupled to fastening member 96 of connector portion 110 as by screws.

Handguard portion 130 is the complementary portion of handguard portion 100, and is arranged to be coupled thereto, as by screws or bolts, around the barrel.

In this embodiment, handguard portion 130 also includes two integrally formed mounting rails 132, such as Picatinny rails, and the second complementary joining element 134 arranged to provide a tight fit when coupled together. Handguard portion 130 may further include a circumferential groove 136 arranged to engage a toothed ring on the firearm barrel, and a tapered end 138 arranged to be engaged by a locking ring, when assembled about the barrel of a firearm based on the AR-15 platform.

It will be appreciated that the invention is not limited to what has been described hereinabove merely by way of example. Rather, the invention is limited solely by the claims which follow.

## CLAIMS

1. A rail connector for a having a front sight, the rail connector comprising:

5 a connector portion adapted to mount the rail connector to the front sight; and  
six mounting rails coupled to the connector portion.

2. The rail connector according to claim 1, and further comprising a handguard portion integrally formed with said connector portion and arranged for  
10 mounting about the barrel of the firearm, wherein said four of said six mounting rails  
are integrally formed with said handguard portion.

3. A rail connector for mounting on a firearm having a front sight, the connector comprising:

15 at least two mounting rails; and  
a fastening member for securely fastening the connector directly to the front  
sight of the firearm, said fastening member being coupled to said mounting rails.

4. The rail connector according to claim 3, wherein said the fastening  
20 member is shaped to seat securely in an aperture defined by the front sight.

5. The rail connector according to claim 4, wherein:

the sight includes a triangular projection defining a triangular aperture with a depending shoulder therethrough, and

25 the fastening member includes a shaped protrusion for seating in the aperture  
against the shoulder, and a protruding lip for lockingly engaging a lower leg of the  
triangular projection.

6. The rail connector according to claim 3, wherein the connector includes two half portions, each including a rail integrally formed with one half the fastening member, the half portions being adapted to seat on opposite sides of the sight and be connected to one another.

5

7. The rail connector according to claim 6, wherein the two rails are formed coaxially in alignment with the fastening member.

8. The rail connector according to claim 6, wherein the two rails are  
10 displaced from and parallel to a longitudinal axis of the fastening member.

9. The rail connector according to claim 3, wherein the fastening member is integrally formed with one rail and, after seating through one side of the front sight of the weapon, a second rail is coupled to the fastening member from an opposite  
15 side of the sight.

10. The rail connector according to claim 6, and further including a handguard portion integrally formed with the fastening member and integrally formed with at least one rail.

20

11. The rail connector according to claim 10, and including four rails integrally formed with said handguard portion.

12. The rail connector according to claim 10 and further including a  
25 circumferential groove arranged to engage a toothed ring about the firearm barrel.

13. The connector according to claim 10, wherein the handguard is formed of two mating units, each including one half of the handguard, and arranged for mating fit around the barrel of a firearm.

14. A method for connecting a rail to a firearm having a front sight, the method comprising:

forming at least two mounting rails; and

5 coupling to said mounting rails a fastening member for securely fastening the connector directly to the front sight of the firearm.

15. The method according to claim 14, wherein said step of coupling includes coupling said fastening member between said mounting rails so as to permit  
10 mounting of said rails on opposite sides of said front sight.

15

  
\_\_\_\_\_  
AGENT FOR APPLICANT



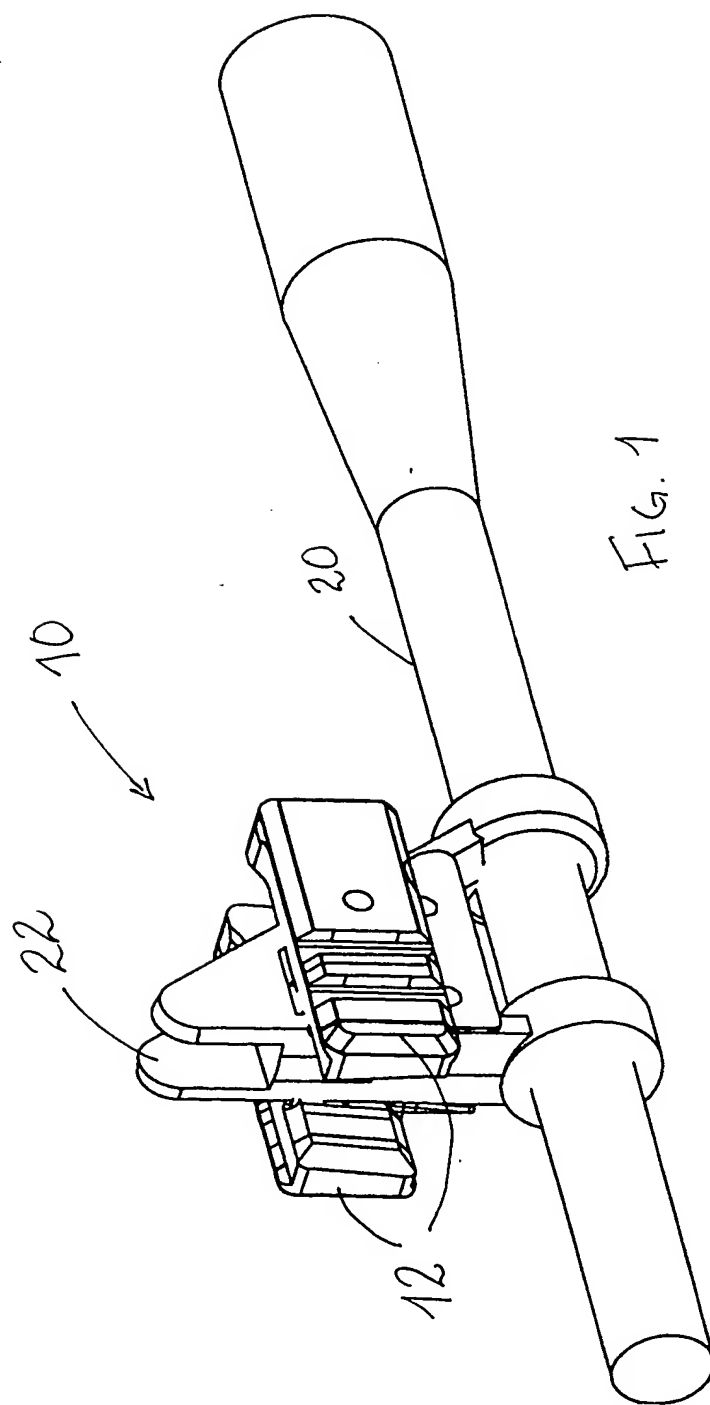


FIG. 1

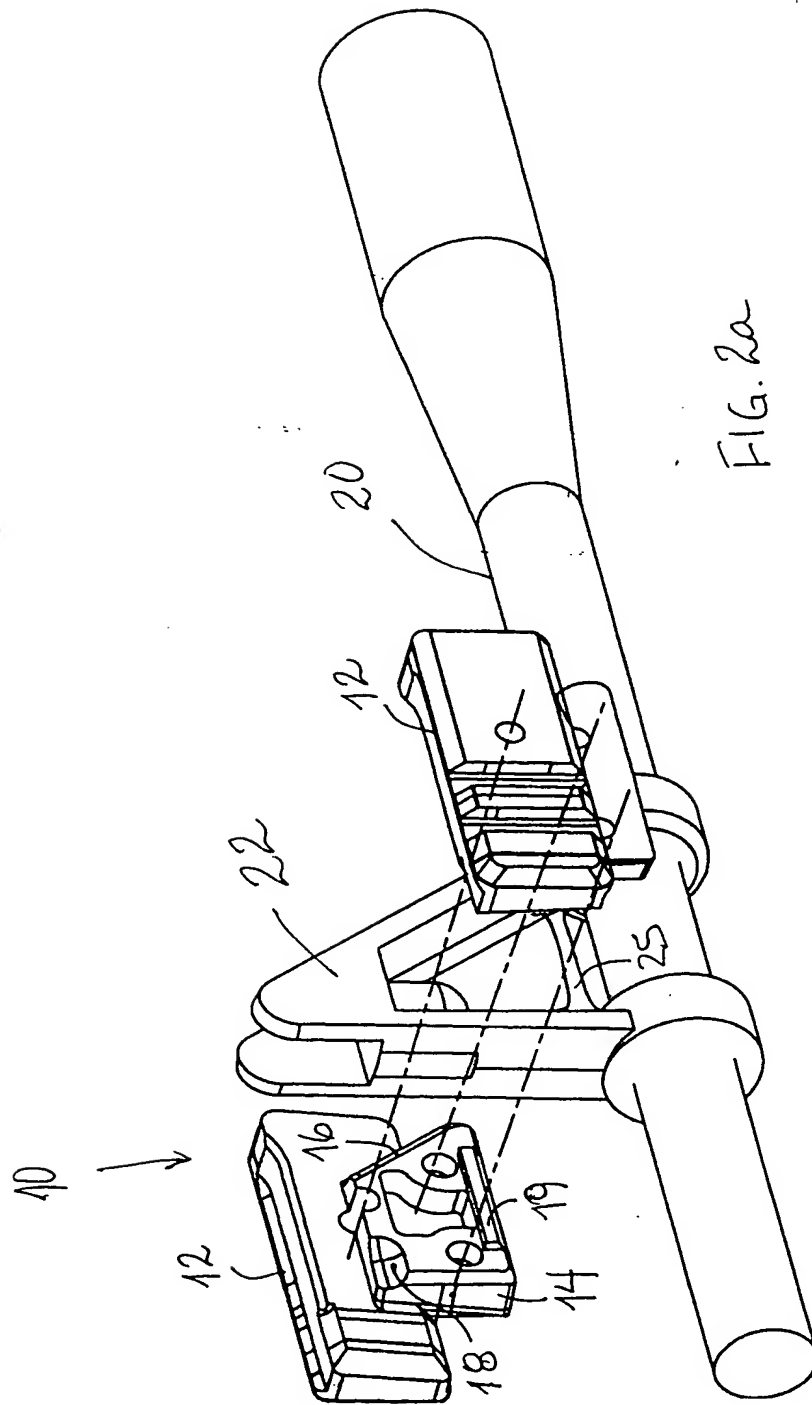
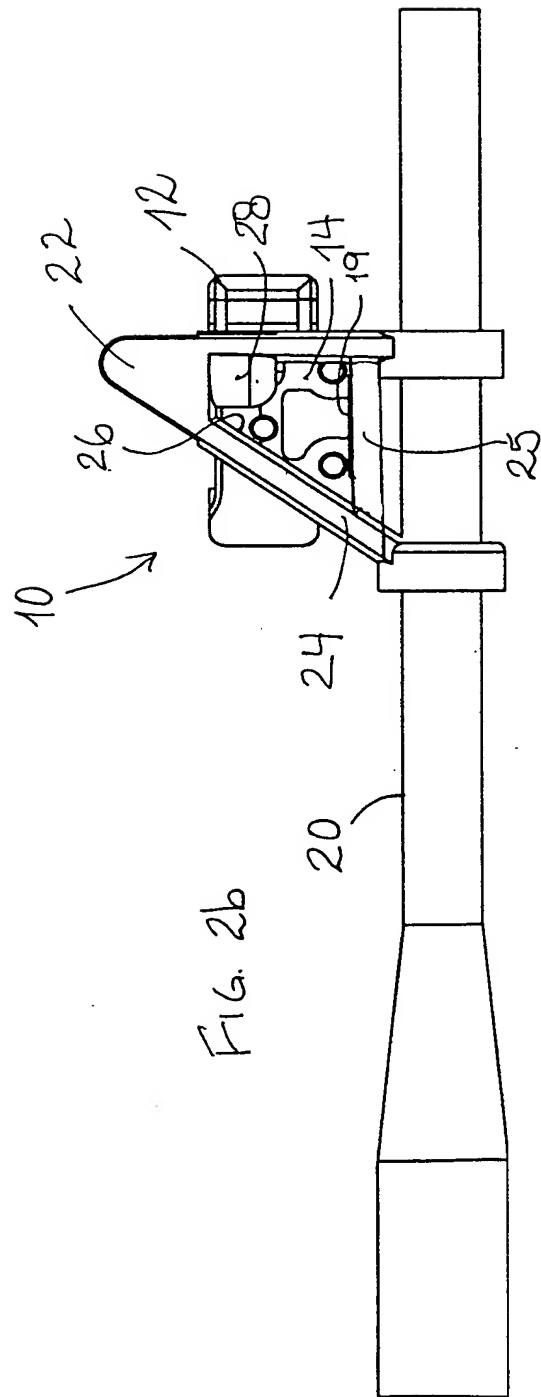


FIG. 2a



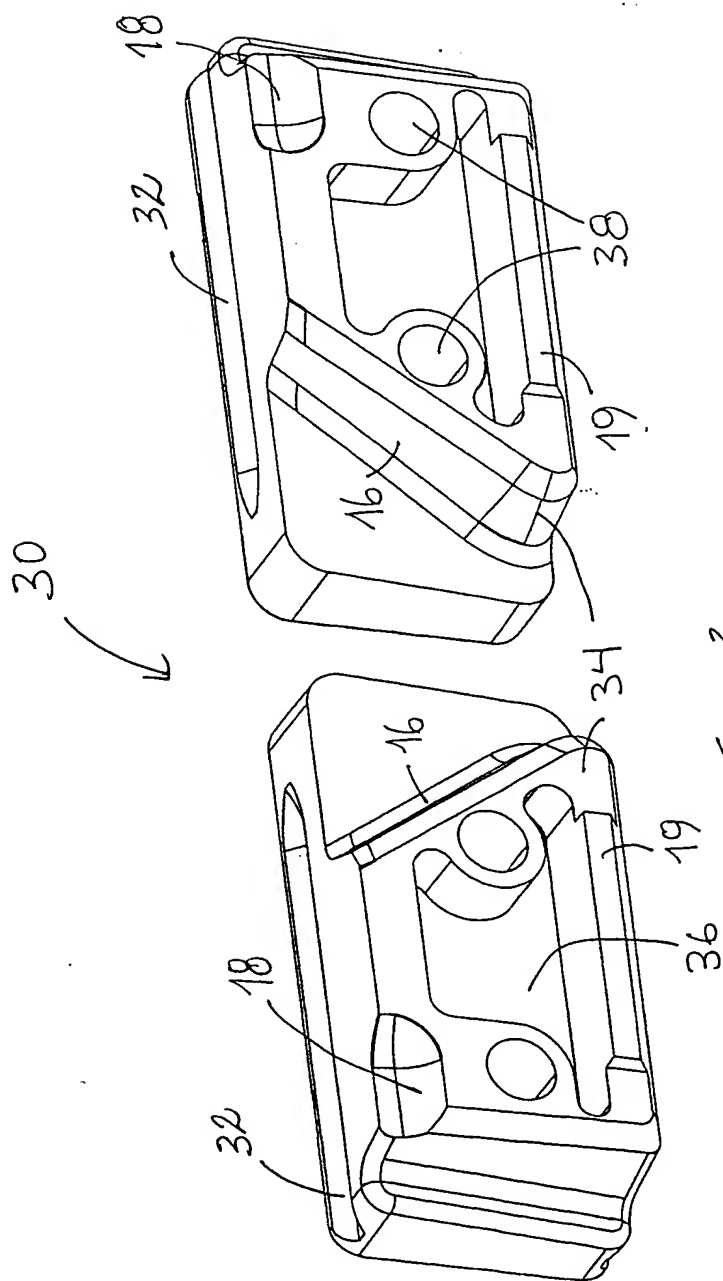


FIG. 3

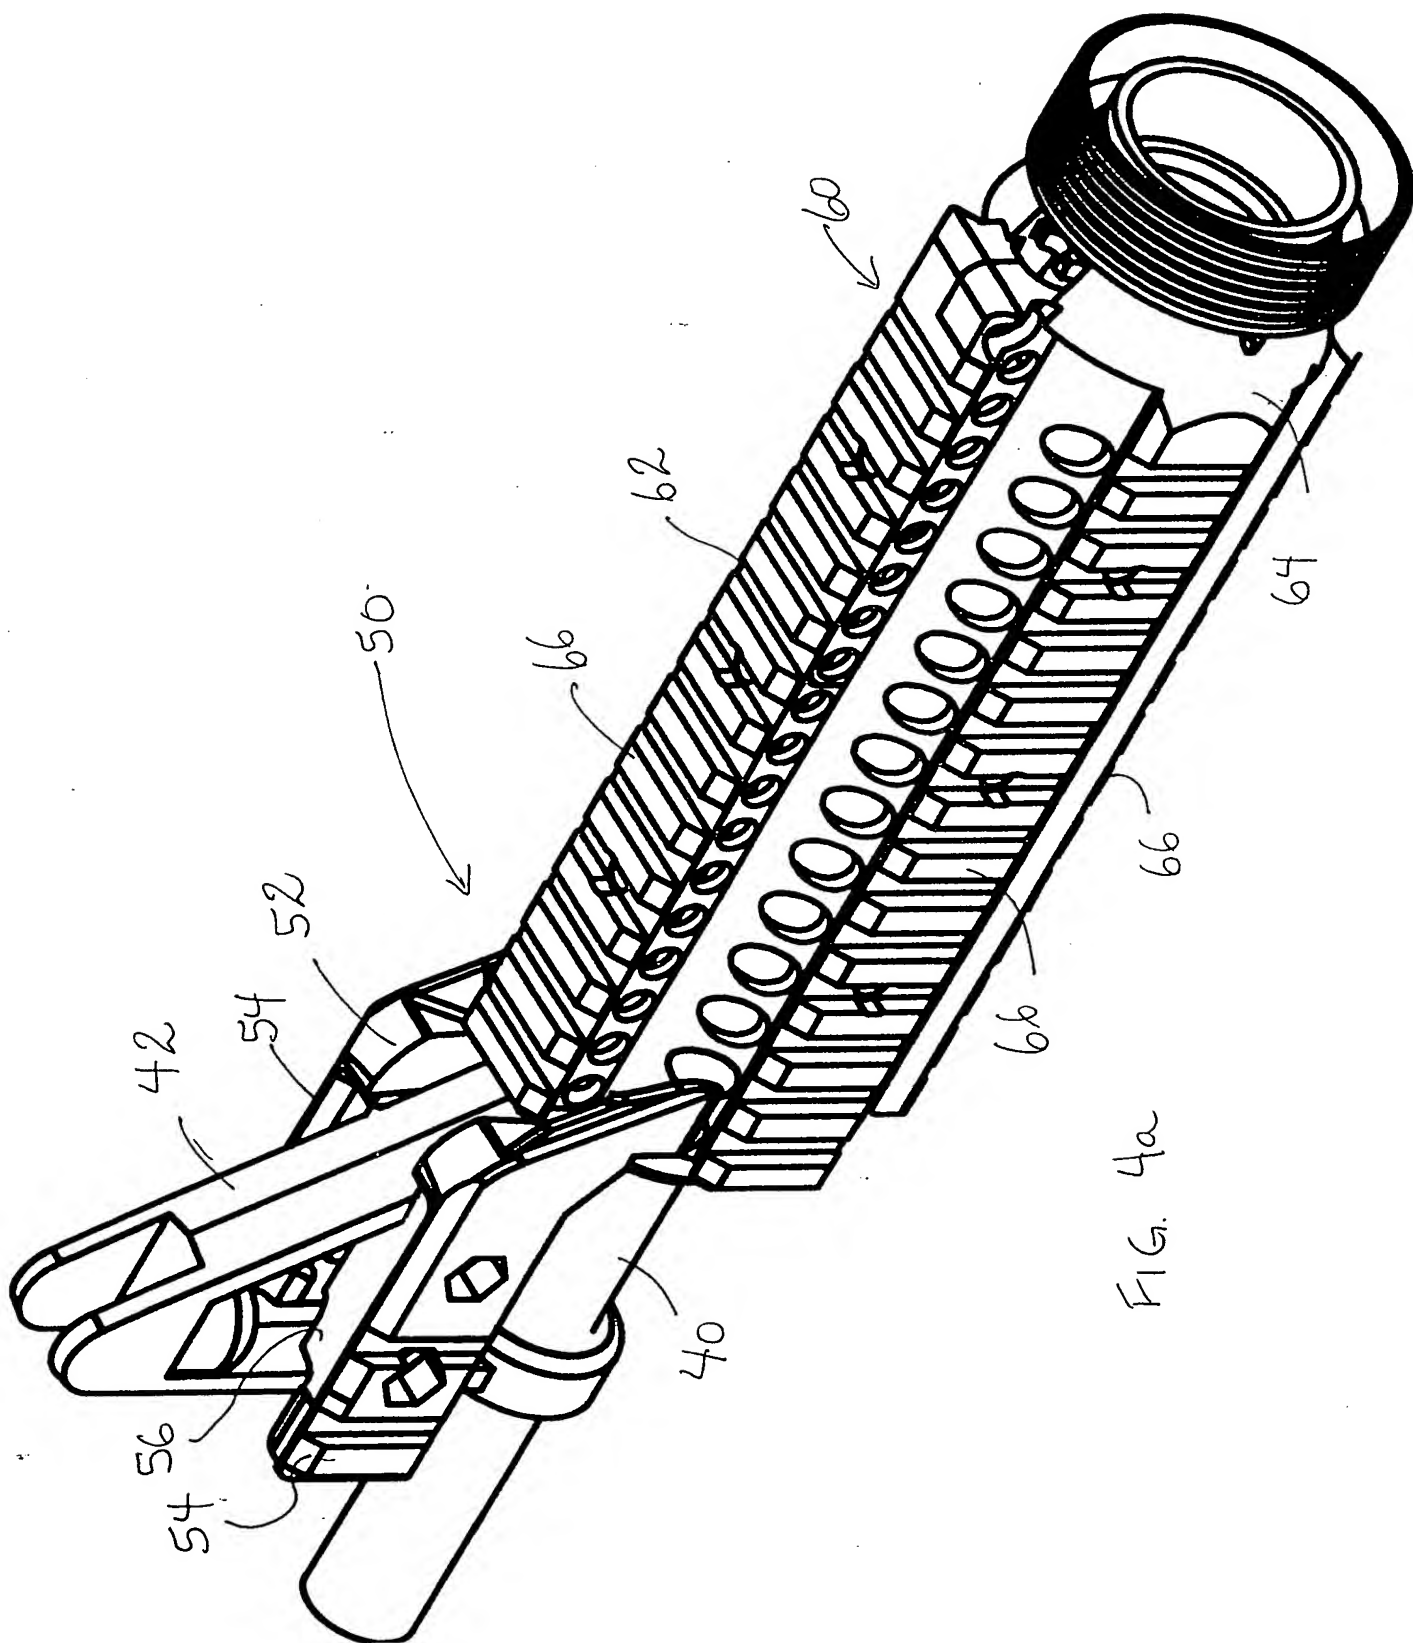
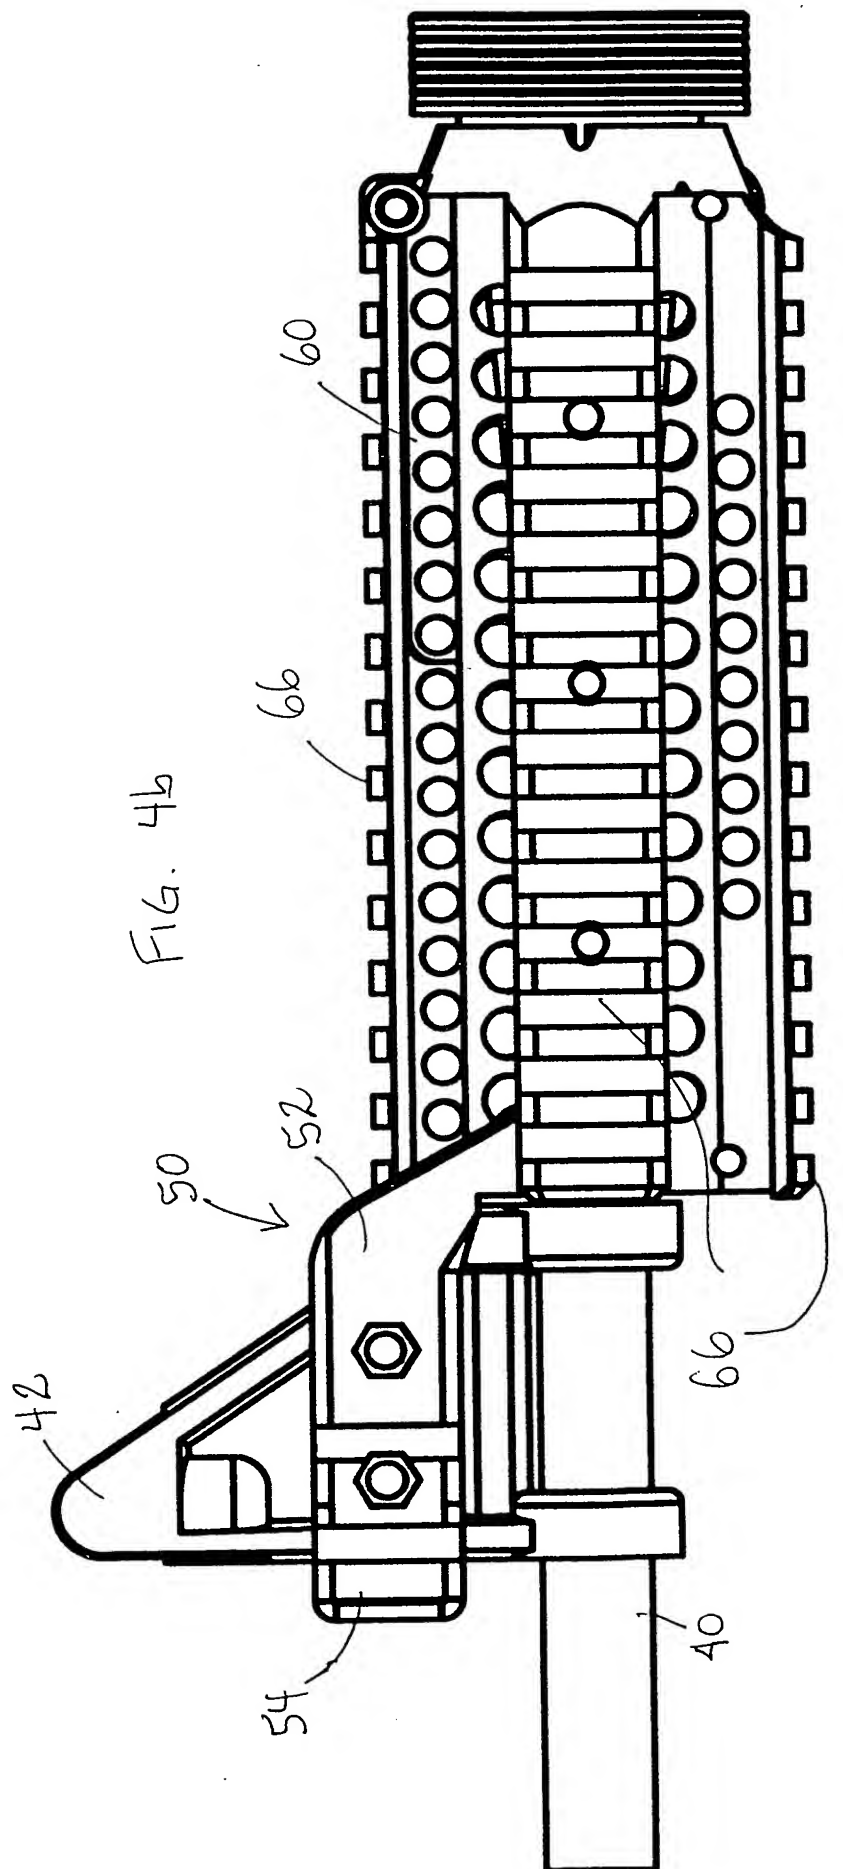


FIG. 4a



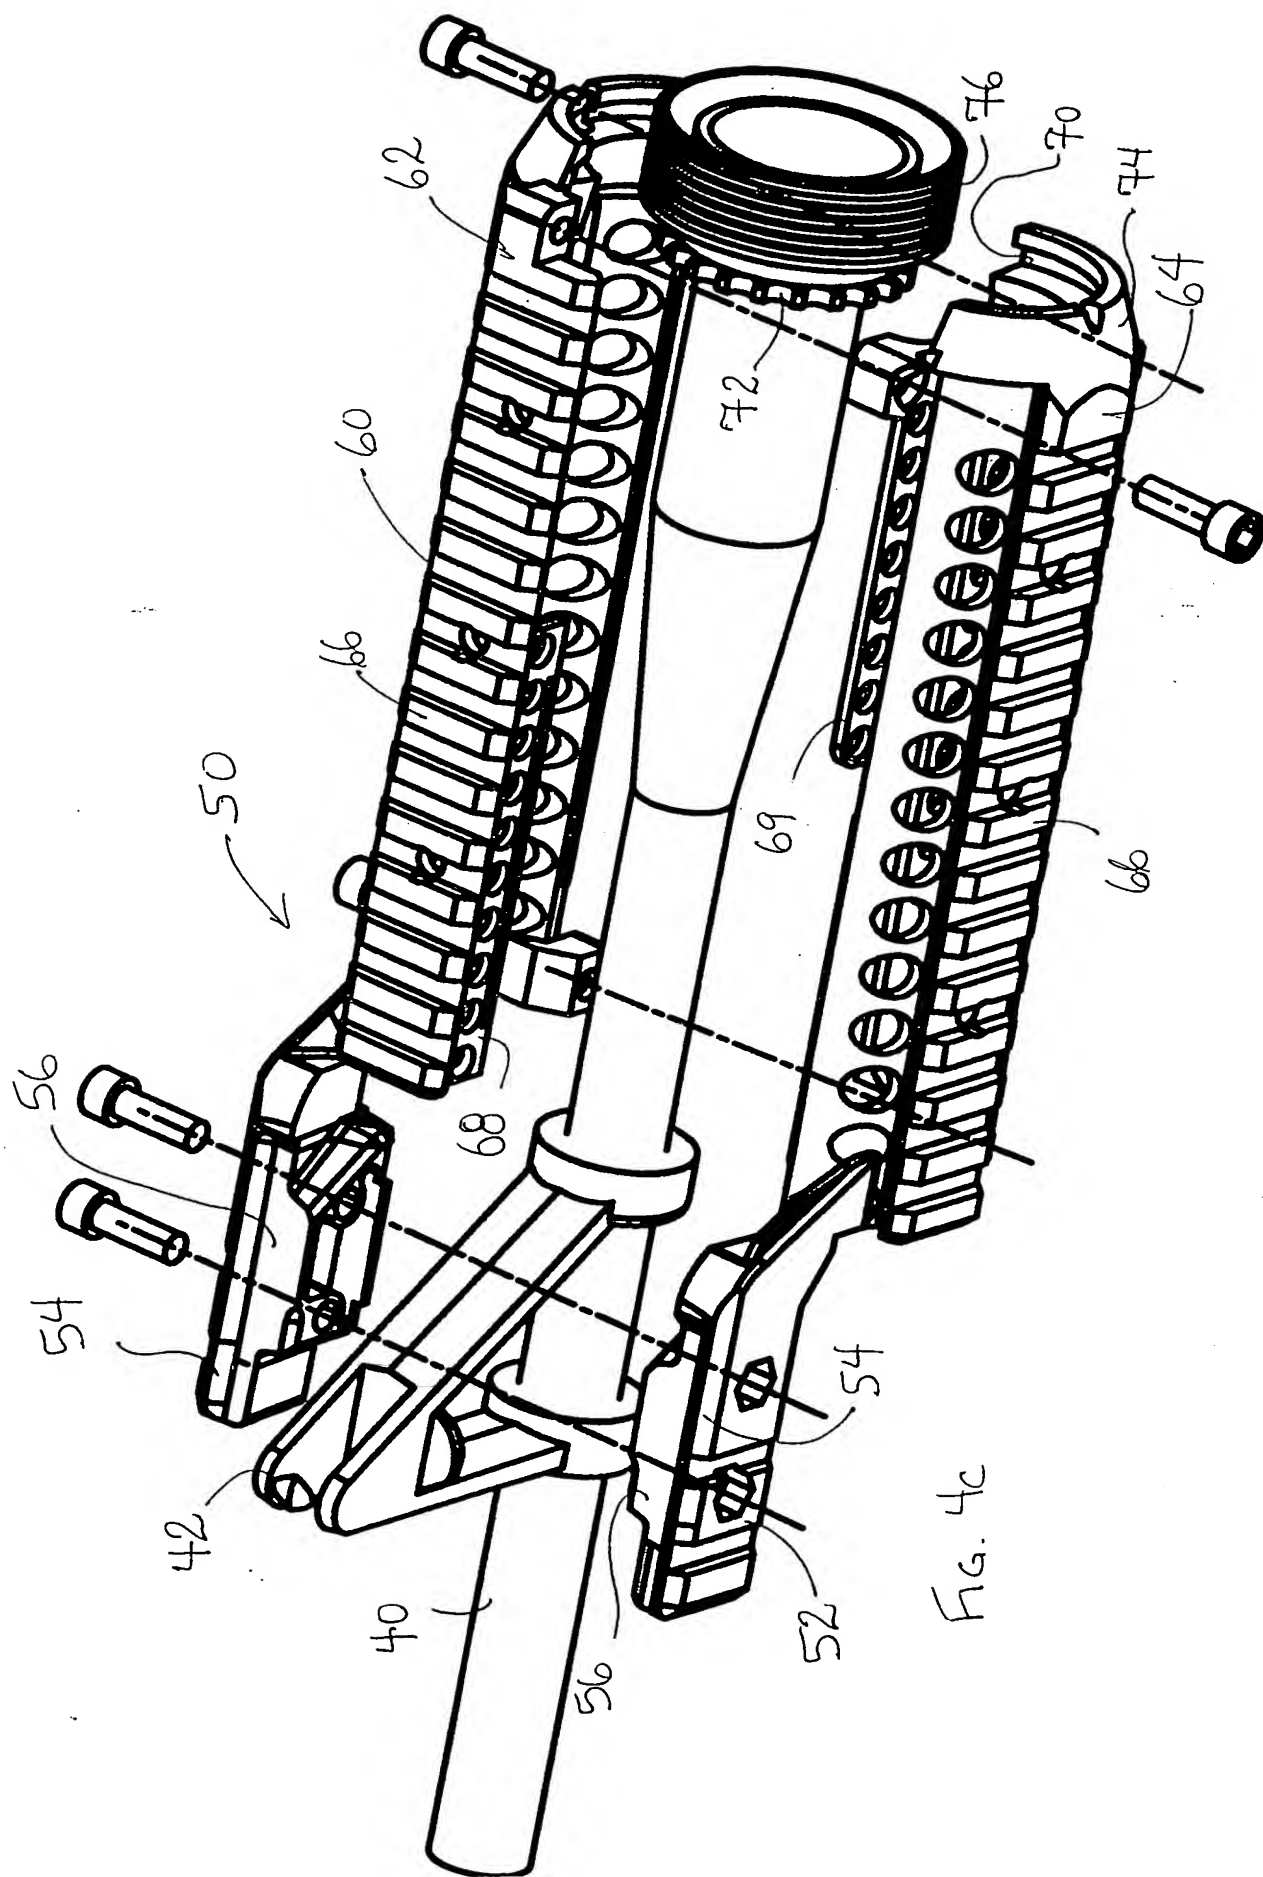


FIG. 4c

